



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 491 416 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**29.12.2004 Bulletin 2004/53**

(51) Int Cl.7: **B60S 1/38**

(21) Application number: **03101908.6**

(22) Date of filing: **26.06.2003**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK**

- **Henin, Pierre**  
**6790, Aubange (BE)**
- **Coos, Eric**  
**6790, Aubange (BE)**

(71) Applicant: **Federal-Mogul S.A.**  
**6790 Aubange (BE)**


(74) Representative: **Hooiveld, Arjen Jan Winfried**  
**Arnold & Siedsma**  
**Sweelinckplein 1**  
**2517 GK Den Haag (NL)**

(72) Inventors:  
• **Jandion, Patrice**  
**6790, Aubange (BE)**

(54) **Windscreen wiper device**

(57) A windscreen wiper device (1) comprising an elastic, elongated carrier element, as well as an elongated wiper blade (2) of a flexible material, which can be placed in abutment with a windscreen to be wiped, which wiper blade (2) includes opposing longitudinal grooves (3) on its longitudinal sides, in which grooves spaced-apart longitudinal strips (4) of the carrier element are disposed, wherein neighbouring ends (5) of said longitudinal strips (4) are interconnected by a re-

spective connecting piece (6), which windscreen wiper device comprises a connecting device (7) for an oscillating wiper arm, with the special feature that at least one connecting piece (6) comprises engaging members (15) engaging around the longitudinal strips (4) so that said strips (4) are mounted in grooves (16) formed by said engaging members (15), wherein said strips (4) and said connecting piece (6) are slidably connected by means of a snap connection.

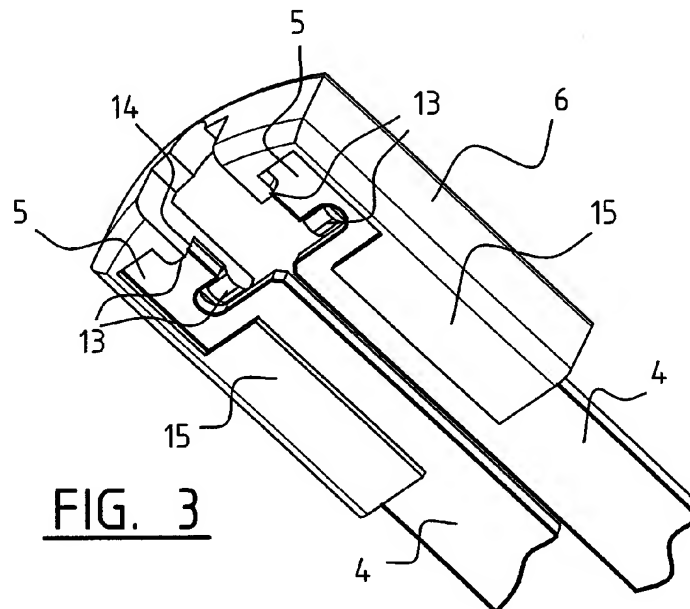

**FIG. 3**

## Description

[0001] The invention relates to a windscreen wiper device comprising an elastic, elongated carrier element, as well as an elongated wiper blade of a flexible material, which can be placed in abutment with a windscreen to be wiped, which wiper blade includes opposing longitudinal grooves on its longitudinal sides, in which grooves spaced-apart longitudinal strips of the carrier element are disposed, wherein neighbouring ends of said longitudinal strips are interconnected by a respective connecting piece, which windscreen wiper device comprises a connecting device for an oscillating wiper arm.

[0002] Such a windscreen wiper device is generally known. The prior art windscreen wiper device is in particular designed as a "yokeless" wiper device, wherein use is no longer made of several yokes pivotally connected to each other, but wherein the wiper blade is biased by the carrier element, as a result of which it exhibits a specific curvature. The oscillating arm of the prior art windscreen wiper device comprises a projecting pin on one side thereof, which is inserted sideways into a through hole of the connecting device.

[0003] One drawback of the prior art windscreen wiper device is the fact that the neighbouring ends of the longitudinal strips and the connecting pieces (in practice also called "end caps" ) are not connected in a durable, solid manner.

[0004] Particularly, as the reliability of said connection diminishes with the passage of time, the connecting pieces may come loose from said strips. As a result of said poor connection, the life span of the prior art windscreen wiper device is seriously shortened.

[0005] The object of the invention is to overcome the drawbacks of the prior art as indicated above, in particular to provide a windscreen wiper device wherein the longitudinal strips and the connecting pieces ("end caps") are interconnected in a durable, solid manner.

[0006] In order to accomplish that objective, a windscreen wiper device of the kind referred to in the introduction is characterized in that at least one connecting piece comprises engaging members engaging around the longitudinal strips so that said strips are mounted in grooves formed by said engaging members, wherein said strips and said connecting piece are slidably connected by means of a snap connection. By sliding said connecting piece over the neighbouring ends of said strips -or vice versa, that is by sliding the neighbouring ends of said strips into said connecting piece- a reliable snap connection between these parts is realized. The snap connection particularly comprises a hole or an aperture and a protrusion cooperating together.

[0007] In one preferred embodiment of a windscreen wiper device in accordance with the invention, the snap connection comprises laterally extending means on said strips. Preferably, said laterally extending means comprise at least one protrusion extending laterally from a

longitudinal edge of each strip, said protrusion being located between stops on the connecting piece. In another preferred version, said laterally extending means comprise at least two stops extending laterally from a longitudinal edge of each strip, said stops being located on opposite sides of a protrusion on the connecting piece.

[0008] In another preferred embodiment of a windscreen wiper device according to the invention, said laterally extending means extend laterally from the interior longitudinal edge of each strip. In the alternative, said laterally extending means extend laterally from the exterior longitudinal edge of each strip.

[0009] In another preferred embodiment of a windscreen wiper device in accordance with the invention, the engaging members are integral with said connecting piece. The connecting piece is particularly made in one piece of plastic.

[0010] In another preferred embodiment of a windscreen wiper device according to the invention, said connecting piece is provided with an opening at its free end so that the wiper blade can freely slide through said connecting piece. In other words, the connecting pieces ("end caps") do not retain the wiper blade, so that said connecting pieces allow a relative movement of the wiper blade along the longitudinal strips in the connecting pieces, thus improving the wiping properties of the present windscreen wiper device.

[0011] In another preferred embodiment of a windscreen wiper device in accordance with the invention, a spoiler is provided and wherein an end of said spoiler is mounted in said connecting piece. The spoiler is preferably a separate constructional element being entirely detachably connected to the wiper blade, wherein the connecting piece can be slid over said spoiler end.

[0012] The invention furthermore relates to a method for manufacturing a windscreen wiper device according to the invention, wherein opposing longitudinal grooves are formed in the longitudinal sides of an elongated wiper blade of a flexible material, which can be placed in abutment with a windscreen to be wiped, in which grooves longitudinal strips of a carrier element are subsequently fitted in spaced-apart relationship, wherein neighbouring ends of said longitudinal strips are interconnected by a respective connecting piece, wherein a connecting device is provided for an oscillating wiper arm, characterized in that said strips and at least one connecting piece are slidably connected by means of a snap connection, wherein engaging members of said connecting piece engage around the longitudinal strips so that said strips are mounted in grooves formed by said engaging members.

[0013] The invention will now be explained in more detail with reference to figures illustrated in a drawing, wherein:

- Figure 1 is a perspective, schematic view of a preferred embodiment of a windscreen wiper device

according to the invention;

- Figures 2 through 6 show details of the windscreen wiper device of Figure 1.

**[0014]** Figure 1 shows a preferred variant of a windscreen wiper device 1 according to the invention. Said windscreen wiper device is built up of an elastomeric wiper blade 2, in the longitudinal sides of which opposing longitudinal grooves 3 are formed, and of longitudinal strips 4 made of spring band steel, which are fitted in said longitudinal grooves 3. Said strips 4 form a flexible carrier element for the rubber wiper blade 2, as it were, which is thus biased in a curved position (the curvature in operative position being that of a windscreen to be wiped). Neighbouring ends 5 of strips 4 are interconnected on either side of the windscreen wiper device 1 by means of connecting pieces 6. The windscreen wiper device 1 is further equipped with a connecting device 7 for an oscillating arm 8, and a spoiler 9.

**[0015]** Figure 2 shows a free end of the windscreen wiper device 1 of figure 1, whereas figure 3 reveals a bottom view of said free end without the wiper blade 2 being present. Corresponding parts have been designated with the same reference numerals. As can be seen from figures 2, 4 and 5 (the latter two figures showing in perspective the connecting piece 6 as a separate constructional element), the connecting piece 6 is provided with an opening 10 in order to allow a relative movement of the wiper blade 2 along the strips 4 inside the connecting piece 6, so that said connecting piece 6 does not block the wiper blade 2 during use. The connecting pieces 6 are made of one piece of plastic.

**[0016]** With reference to figure 6 relating to a top view of the strips 4 as such, said strips 4 are each provided with a protrusion 11 extending laterally from a longitudinal interior edge 12 of the strips 4. When a connecting piece 6 is slidably mounted onto the neighbouring ends 5 of the strips 4, a snap or clicking connection is realized, wherein the protrusions 11 are snapped or clicked between stops 13 ("notches 13") inside the connecting piece 6. Each protrusion 11 rests in a small groove 14 between these opposing stops 13. Accordingly, the strips 4 are blocked against any movement in longitudinal direction with respect to the connecting pieces 6. Each connecting piece 6 is also provided with two engaging members 15 made integral therewith, wherein said engaging members 15 engage around the strips 4 so as to form a groove 16 for sliding the strips 4 therein. Said engaging members 15 ensure that the strips 4 are blocked against any movement in transversal direction with respect to the connecting pieces 6. Each connecting piece 6 has a cavity 17 to accommodate the free end of the spoiler 9.

**[0017]** The stop 13 facing away from the free end of the connecting piece 6 is equipped with an inclined upper surface, so that sliding said connecting piece 6 onto the strips 4 does not take too much force, whereas once the protrusion 11 rests inside said groove 14 dismount-

ing the connecting piece 6 from the strips 4 cannot take place easily. The stop 13 facing towards the free end of the connecting piece 6 also ensures that the strips are kept at a mutual constant distance, as the upper end of each strip 4 is located between said stop 13 and a (side) wall of the connecting piece 6.

**[0018]** The present invention is not limited to the embodiment shown, but extends also to other embodiments falling within the scope of the appended claims.

## Claims

1. A windscreen wiper device comprising an elastic, elongated carrier element, as well as an elongated wiper blade of a flexible material, which can be placed in abutment with a windscreen to be wiped, which wiper blade includes opposing longitudinal grooves on its longitudinal sides, in which grooves spaced-apart longitudinal strips of the carrier element are disposed, wherein neighbouring ends of said longitudinal strips are interconnected by a respective connecting piece, which windscreen wiper device comprises a connecting device for an oscillating wiper arm, **characterized in that** at least one connecting piece comprises engaging members engaging around the longitudinal strips so that said strips are mounted in grooves formed by said engaging members, wherein said strips and said connecting piece are slidably connected by means of a snap connection.
2. A windscreen wiper device according to claim 1, wherein the snap connection comprises laterally extending means on said strips.
3. A windscreen wiper device according to claim 2, wherein said laterally extending means comprise at least one protrusion extending laterally from a longitudinal edge of each strip, said protrusion being located between stops on the connecting piece.
4. A windscreen wiper device according to claim 2 or 3, wherein said laterally extending means comprise at least two stops extending laterally from a longitudinal edge of each strip, said stops being located on opposite sides of a protrusion on the connecting piece.
5. A windscreen wiper device according to any of the preceding claims 2 through 4, wherein said laterally extending means extend laterally from the interior longitudinal edge of each strip.
6. A windscreen wiper device according to any of the preceding claims 2 through 5, wherein said laterally extending means extend laterally from the exterior longitudinal edge of each strip.

7. A windscreen wiper device according to any of the preceding claims 1 through 6, wherein the engaging members are integral with said connecting piece.
8. A windscreen wiper device according to any of the preceding claims 1 through 7, wherein said connecting piece is provided with an opening at its free end so that the wiper blade can freely slide through said connecting piece.
9. A windscreen wiper device according to any of the preceding claims 1 through 8, wherein a spoiler is provided and wherein an end of said spoiler is mounted in said connecting piece.
10. Method for manufacturing a windscreen wiper device according to any of the preceding claims 1 through 9, wherein opposing longitudinal grooves are formed in the longitudinal sides of an elongate wiper blade of a flexible material, which can be placed in abutment with a windscreen to be wiped, in which grooves longitudinal strips of a carrier element are subsequently fitted in spaced-apart relationship, wherein neighbouring ends of said longitudinal strips are interconnected by a respective connecting piece, wherein a connecting device is provided for an oscillating wiper arm, **characterized in that** said strips and at least one connecting piece are slidably connected by means of a snap connection, wherein engaging members of said connecting piece engage around the longitudinal strips so that said strips are mounted in grooves formed by said engaging members.

5

10

15

20

25

30

35

40

45

50

55

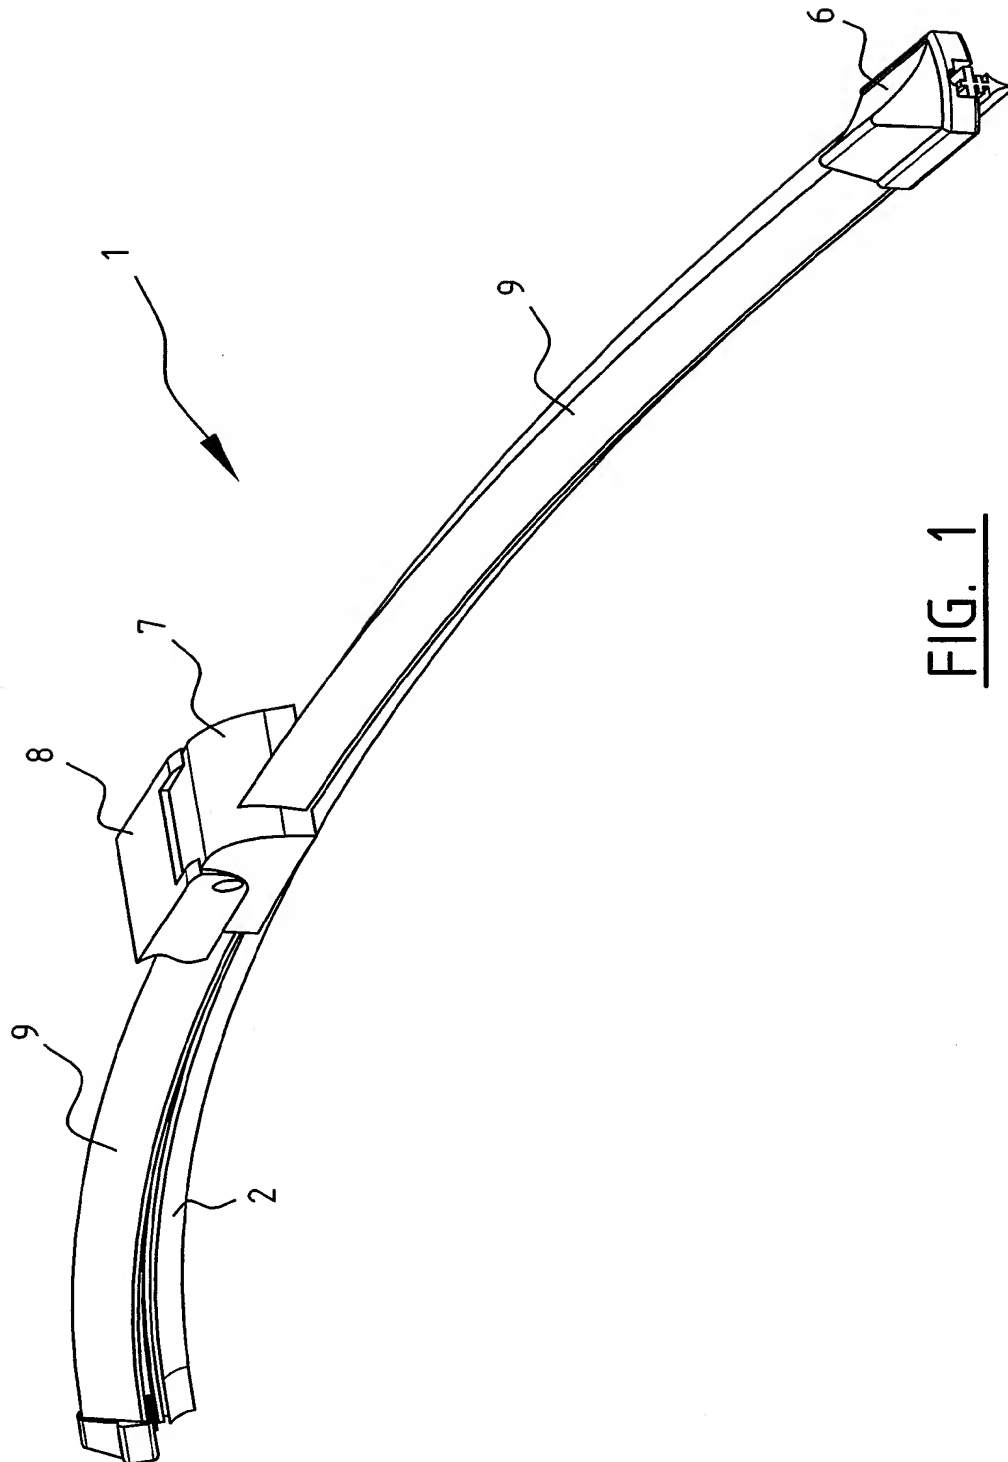


FIG. 1

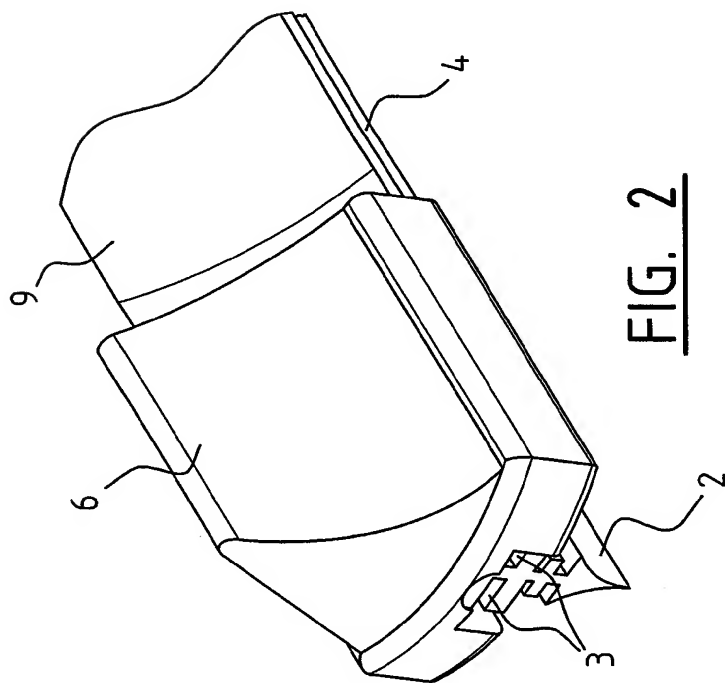


FIG. 2




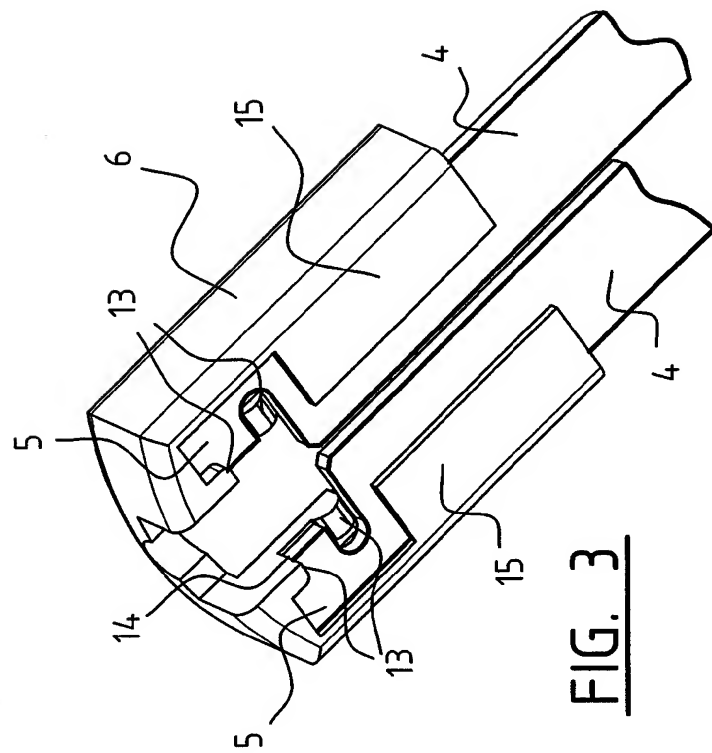


FIG. 3

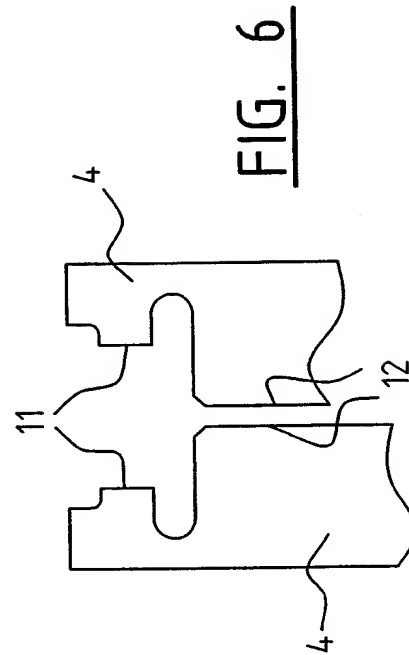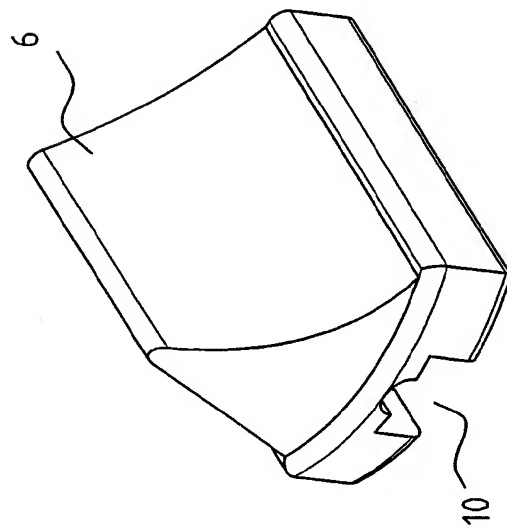

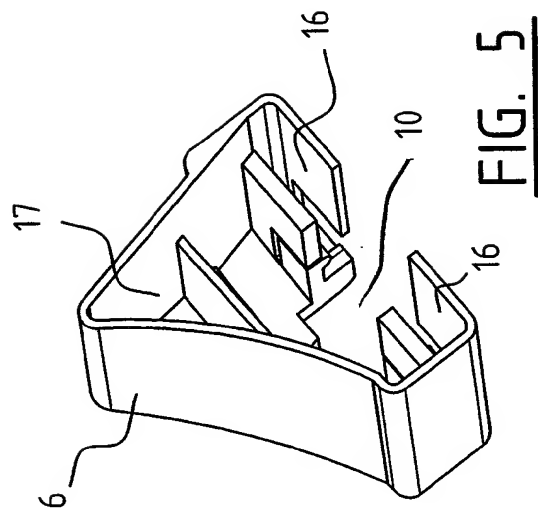

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 03 10 1908

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 199 51 363 A (BOSCH GMBH ROBERT) 3 May 2001 (2001-05-03) * column 3, line 22 - column 4, line 38; figures *	1-8,10	B60S1/38
Y	---	9	
Y	US 6 523 218 B1 (KOTLARSKI THOMAS) 25 February 2003 (2003-02-25) * column 1, line 38 - column 2, line 31; figures 1,6,8-11 * * column 3, line 1 - column 5, line 51 *	9	
X	DE 198 02 451 A (BOSCH GMBH ROBERT) 29 July 1999 (1999-07-29) * column 5, line 45 - column 6, line 16; figure 8 *	1-8,10	
X	DE 199 61 373 A (VOLKSWAGENWERK AG) 19 July 2001 (2001-07-19) * column 2, line 54 - column 4, line 4; figures *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B60S
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 21 November 2003	Examiner Sangiorgi, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02) (p04001)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 10 1908

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-11-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19951363 A	03-05-2001	DE 19951363 A1	03-05-2001
		AU 7505700 A	08-05-2001
		BR 0007259 A	30-10-2001
		CN 1327422 T	19-12-2001
		CZ 20012339 A3	16-01-2002
		WO 0130618 A1	03-05-2001
		DE 10083237 D2	25-04-2002
		EP 1140585 A1	10-10-2001
		JP 2003512247 T	02-04-2003
US 6523218 B1	25-02-2003	DE 19856300 A1	08-06-2000
		AU 762557 B2	26-06-2003
		AU 1260900 A	26-06-2000
		BR 9907680 A	24-10-2000
		WO 0034090 A1	15-06-2000
		EP 1053145 A1	22-11-2000
		JP 2002531325 T	24-09-2002
DE 19802451 A	29-07-1999	WO 0102224 A1	11-01-2001
		DE 19802451 A1	29-07-1999
		ZA 9900472 A	24-07-2000
		EP 1131234 A1	12-09-2001
		JP 2003503275 T	28-01-2003
DE 19961373 A	19-07-2001	DE 19961373 A1	19-07-2001

**PUB-NO:** EP001491416A1  
**DOCUMENT-IDENTIFIER:** EP 1491416 A1  
**TITLE:** Windscreen wiper device  
**PUBN-DATE:** December 29, 2004

**INVENTOR-INFORMATION:**

<b>NAME</b>	<b>COUNTRY</b>
JANDION, PATRICE	BE
HENIN, PIERRE	BE
COOS, ERIC	BE

**ASSIGNEE-INFORMATION:**

<b>NAME</b>	<b>COUNTRY</b>
FEDERAL MOGUL S A	BE

**APPL-NO:** EP03101908  
**APPL-DATE:** June 26, 2003

**PRIORITY-DATA:** EP03101908A (June 26, 2003)

**INT-CL (IPC):** B60S001/38

**EUR-CL (EPC):** B60S001/38